



medemagroup



Serial number: ____ - ____ - ____ - ____

Delivery date: _____ Year 20_____

This vehicle was supplied by:

Date: /

Dealer:

For this product You can expect to find the following documentation:

- User manual
- Service manual
- Spare parts list
- Presell information.

Medema A/S

Enggårdvej 7
Snebjerg
DK-7400 Herning
Denmark

Telefon: +45 70 10 17 55
Mail: info@medema.com

Contents

Intended occupant.....	5
Help for the visually impaired	5
FSN (Field Safety Notice).....	5
Symbols.....	6
Warning!	6
Joystick	6
Contagion!.....	6
Introduction.....	7
Medema A/S Warranty	9
Designations	10
Designations Joystick.....	11
Designations functions.....	12
Joystick lock / unlock	13
Safety check Joystick	13
General care and maintenance	14
Insurance.....	15
Preparations / Adjustments prior to use	16
Seat rotation.....	18
Serial number.....	19
Driving the Mini Crosser X-Joy	20
Lap belt.....	23
Specific driving situations.....	25
Long hills/difficult ground	27
Anti-tilt wheels / stabilisers	28
Batteries	29
Storage/Charging	30
Battery disposal.....	32
Changing the wheels.....	33
Fuses	35
Brakes.....	36
Disengagement.....	37
Transporting by motor vehicle.....	38
Securing to vehicle floor with belts	39
Transporting by plane	42
Towing	42
Dimensioned drawing, Mini Crosser X-Joy	43
Introduction to the Ergo2 seat	44
Flame resistance	48
Basket on seatback.....	49
Electric functions	50
Troubleshooting	51
Troubleshooting	52

Programming 53
Technical data..... 54
Cassation 56
Weight of the seats..... 57
Own notes 58

Intended occupant

The intended occupant of the wheelchair is a person with limited ability of walking themselves.

The wheelchair is equipped with a joystick control which makes it usable for an occupant who only has low functionality in the fingers. It can be driven with only one hand either left or right.

The occupant must be able to see in order to register traffic signals and other road users when driving in traffic. The occupant can be deaf and/or speechless.

The occupant must have a cognitive ability to understand the operation of the joystick and its buttons and icons.

The maximum occupant weight is 150 kg.

Help for the visually impaired

If you have difficulty reading small print in the user manual, we recommend that you visit our website, where you can read this manual in PDF format. You can enlarge the PDF manual on your PC monitor to suit your needs and preferences.

If you find it difficult to understand the manual and have general questions about the product, please feel free to contact us. You can find our contact info on page two in this user manual.

You can find manuals for all our products on our web page www.medema.dk. Or contact Medema A/S, and we can send the manuals in a mail for you. Find the contact information on page two in this manual.

FSN (Field Safety Notice)

All information concerning safety can be found at www.medema.com, which is always updated with the latest safety information. In the event of important safety-related changes, we will notify our customers directly (FSN).

Symbols



Used in the manual to indicate sections describing situations where extra care is required owing to the risk of personal injury.



Used to indicate sections on electromagnetic compatibility (EMC).

Warning!



For safety reasons the vehicle must not be lent to persons who are not completely familiar with it. The vehicle is designed for one person only.



The Mini Crosser X-Joy has been designed for users weighing max. 150 kg.

Joystick



The joystick control box must not be exposed to extremes of temperature or kept in a damp environment for extended periods.



The joystick control box must not be subjected to heavy knocks.



Do not switch off the control box while driving, except in an emergency, as this may damage the electronics.



For cleaning, use a damp cloth with slightly soapy water. Do NOT allow any water or moisture to enter the control box.

Contagion!

A standard Mini Crosser is equipped with tyres that does not contage, but if another type of tyres are used, it can sometimes rub off on floor coverings, particularly linoleum. Medema A/S assumes no responsibility in case of contagion.

To prevent this, we recommend that you protect delicate floors with some sort of driving surface.

Introduction

Congratulations on your new Mini Crosser X-Joy electric mobility wheelchair.

You are now the owner of an electric mobility wheelchair developed for use indoors as well as outdoors. It is what is called a Class C vehicle according to the European standard EN 12184.

To get the best out of this vehicle - and to avoid breakdowns and accidents - we recommend that you read this User Manual carefully. If you are a new user, you should pay particular attention to the section "Driving the Mini Crosser X-Joy".

The Mini Crosser X-Joy is designed to stay safe to use for at least 10 years, up to a maximum of 5,000 hours, providing it has service and safety inspections every third year, which is equivalent to around 1500 operating hours. The service must be carried out either by Medema A/S or an authorised workshop.



IMPORTANT! For safety reasons it is of the utmost importance that service and safety check intervals are complied with, as this minimises the risk of brake failure and short-circuits in the wiring, which could generate heat and cause a fire.

We offer a wide range of accessories for the Mini Crosser X-Joy that can make everyday life easier for you. You are always welcome to contact us for further information on special accessories and adaptations.

Medema A/S is not responsible for any damage or injuries caused by inappropriate or unsafe use of the Mini Crosser X-Joy.

If you have any further questions about the Mini Crosser X-Joy or this User Manual, you are always welcome to get in touch. Our contact details are as follows:

Medema A/S
Phone: +45 70 10 20 54
Email: info@medema.com
Internet: www.medema.dk

NB: Errors and omissions excepted. We reserve the right to update this manual as required.

Manufacturer
 Medema A/S
 Enggårdvej 7
 DK-7400 Herning

Herning, 7. October 2020

EC – Declaration of conformity
 Mini Crosser model X-Joy

Medema-A/S declares on our sole responsibility that the product range mentioned below are manufactured in accordance with our incorporated standards and are in conformity with the following directives and standards if they are used according to our instructions:

Regulation (EU) 2017/745 of the European Parliament and of the Council of 5 April 2017 on medical devices.

EN 12184:2014 Electrically powered wheelchairs, scooters and their chargers - Requirements and test methods.

Directive 2006/42/EC of the European Parliament and of the Council of 17 May 2006 on machinery, and amending Directive 95/16/EC.

Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

EN 50581:2012 Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances.

ISO 14971:2012 Medical devices – Application of risk management to medical devices.

Type of use : Transporting walking disabled people
 Risk Class : 1 according to rule 1.

The product range in the **Mini Crosser model X-Joy** includes the following items

Product name	Basic UDI-DI
Mini Crosser X-Joy 4W 10 km/h	5707299MCXJ-4W10FU
Mini Crosser X-Joy JR 4W 10 km/h	5707299MCXJJR-4W10WT
Mini Crosser X-Joy 4W EL 10 km/h	5707299MCXJ-4WEL10L2
Mini Crosser X-Joy 4W EL JR 10 km/h	5707299MCXJ-4WELJR10FY
Mini Crosser X-Joy CAB 10 km/h	5707299MCXJ-4WCAB10BB

Medema-A/S



.....
Klaus Smedegaard
 R&D Manager

Medema A/S

Enggårdvej 7
 Snebjerg
 7400 Herning

CVR/VAT: DK 51 89 27 12
 SRN: DK-MF-00000981

Phone: 70 10 17 55

info@medema.com
 www.medema.com



medemagruppen

Medema A/S Warranty

1:

There is a 2-year warranty, with the exception of worn parts such as tires, hoses, fuses, light bulbs, bushings and brake pads.

2:

If you want to make a claim for a part under the warranty, it must be intact. The warranty will be void if the product has been removed or appears to have been mishandled.

3:

There is a 5-year warranty against breakage and corrosion of the undercarriage.

4:

For the warranty to cover batteries, the charger used must be sold by Medema A/S.

The fabric, type and serial number must be indicated on the warranty specification, otherwise, warranty coverage may be denied.

5:

Items returned under a warranty claim must be suitably packaged to prevent damage during transport. Items damaged during transport due to poor packaging will not covered by the warranty.

6:


The warranty does not cover freight costs.

7:


The warranty requires service inspection and maintenance of the Mini Crosser by authorised professionals.

Designations

The following designations refers to the explanation later in the instruction book.

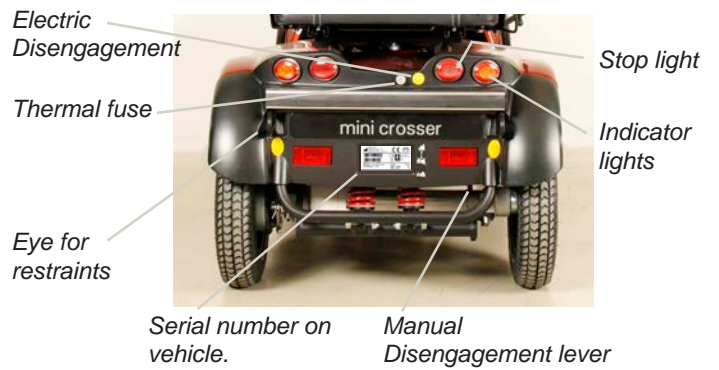


Designations Joystick

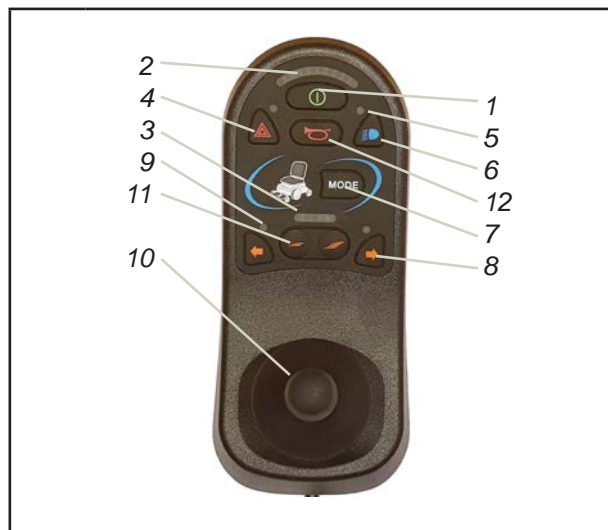

P&G R-net	
1	Start/stop-button
2	Battery indicator
3	Driving profile
4	Warning blinkers
5	Mode LED
6	Light
7	Mode button (electric functions)
8	Blinkers left/right
9	Mode LED
10	Joystick
11	Speed increase / decrease
12	Horn

Designations functions

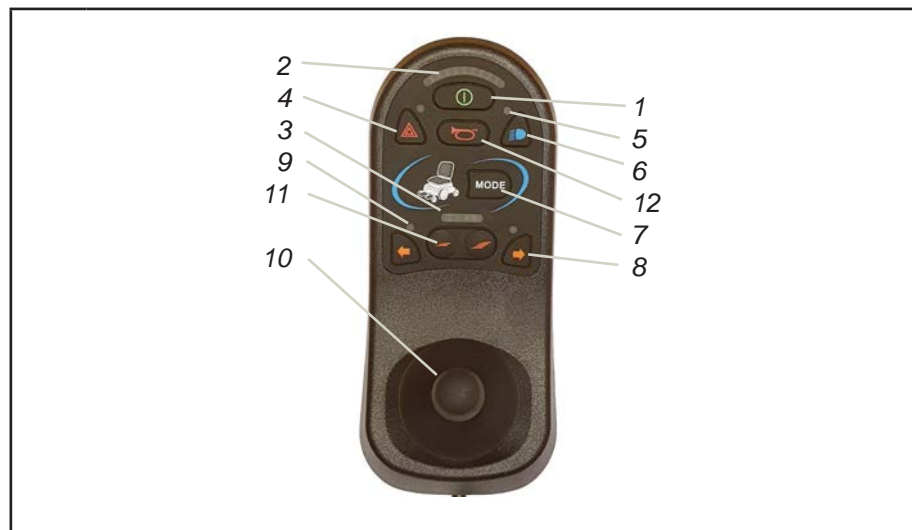

P&G R-net	
1	Press the button 1 to start the Mini Crosser. Wait until the battery indicator is stable (3-5 sec).
2	Battery indicator Show a more precis indication after approximately one minute of driving. When all the LED is lit, the batteries are fully loaded. When only a couple of yellow lights are visual - charge as soon as possible. If only the red LED are showing, or if they are blinking - charge right away.
3	Driving profile show what the maximum speed are set to. There are five LED. One LED refer to lowest speed and five LED refer to maximum speed.
4	Warning blinkers - all blinkers are activated. Even if the vehicle is turned of, it will not stop blinking. To turn of the warning blinkers, the vehicle must be turned on, and press the button for warning blinkers button (4) again.
5	Mode LED - lights up when the associated function is active
6	Light - turn the front- and backlight on. Turn it off again by pressing the light button (6) again.
7	Mode button - (electric functions). Scrolls through the available electric functions. Use joystick up/down to adjust.
8	Blinkers (right and left) start blinkers on the side the arrow shows.
9	Mode LED - lights up when the associated function is active
10	Joystick - controls the direction and speed of the vehicle.
11	Speed increase/decrease - increase or decrease the maximum speed.
12	Horn - powerful electric horn.

Joystick lock / unlock

X-Joy can be locked, so unauthorized persons cant use it.

- Turn on the Joystick
- Push and hold the on/off button. After 1 sec, you will hear a short audio signal.
- Let go of the on/off button. Move the joystick forward until you hear a short audio signal.
- Move the joystick backward until you hear a long audio signal.
- X-Joy is locked.

It is now impossible to drive the X-Joy.

Unlock:

- Turn on the Joystick
- Move the joystick forward until you hear a short audio signal.
- Move the joystick backward until you hear a short audio signal.
- Let go of the joystick and you will hear a long audio signal.
- X-Joy is now unlocked.

Safety check Joystick

Daily safety check: (User)

The electronic system has an integrated safety check which runs up to 100 times per minute. To supplement this check, you should carry out the following regular checks.

- Switch off the electronic system (no lights in the display)
- Check if the joystick is bent
- Check if the joystick is damaged in any other way
- Check that it returns to the central position when you release it

If the check reveals any problems, contact a competent service engineer before using the Mini Crosser again.

Weekly safety check: (User)

Parking brake: This test must be carried out on a flat surface with at least one metre of free space around the Mini Crosser.

- Start the Mini Crosser and slowly move the joystick forward. There is a clicking sound. (The Mini Crosser may start to move in this setting).
- Immediately release the joystick and listen for the clicking sound, which should occur within one second.

Repeat in all directions.

- Check that the rubber bellows around the joystick is intact. This is important, as the bellows prevent moisture getting into the electronic system.
- Check that the control box is properly secured.

If the check reveals any problems, contact a competent service engineer before using the Mini Crosser again.

Monthly check: (User)

Check the tyre pressure at least once a month. See technical data for correct pressure.

General care and maintenance

A Mini Crosser X-Joy does not require much maintenance. It should be kept in a generally good condition, however. The following should be checked regularly:

- Tyre pressure (if pneumatic tyres are fitted)
- Tyre wear
- Keep the control panel, the charging socket and the electronics box under the seat dry.
- Battery charging



Never wash the Mini Crosser with a high-pressure cleaner or direct water jet! This could damage the Mini Crosser's electronics.

To keep the Mini Crosser in good condition safety-wise, we recommend the following regular checks:

Daily: (User)

- Test the indicators and driving lights before using the Mini Crosser in the dark or poor visibility.

Every three months: (User)

Test the brakes and motor disengagement

With the disengagement lever up, it must not be possible to push the Mini Crosser.

Test the brake disengagement function

When the brake disengagement lever is down, the battery indicator should flash to show an error if the Mini Crosser is turned on. In this case the Mini Crosser must not be able to move when the joystick is activated.

Test the hand brake.

Apply the hand brake for a couple of seconds at low speed. This will ensure that the lever arm and brake shoes do not seize up.

Lubricate the lever arm on the brake hub with acid-free oil - left-hand rear wheel.

Service: (Technician)

The Mini Crosser X-Joy is designed for safe travel for at least 10 years, up to a max. of 5,000 hours, provided it is serviced and safety-checked every third year, corresponding to 1500 hours of operation. The service must be carried out by an authorised workshop.



IMPORTANT! For safety reasons it is of the utmost importance that the servicing and safety check intervals are complied with, as this minimises the risk of brake failure and short-circuits in the wiring, which could generate heat and cause a fire.

(For further information, consult the Service Manual.)

Insurance

In the eyes of the law a Mini Crosser X-Joy with a maximum speed of 13 km/h is a bicycle, so separate insurance is not required.

Most contents/home insurance policies include third-party liability insurance for cyclists and so also cover Mini Crosser X-Joy users.

We recommend that you talk to your insurance company about this when the vehicle is delivered. If necessary, comprehensive insurance will have to be taken out separately.

Preparations / Adjustments prior to use

Adjusting the height of the seat


Lift both armrests up, and fold the seatback. Release the handle so the seat can turn. Turn a little and lift the seat off.

Make sure you keep your back straight when lifting the seat, which is very heavy.



Lift the seat off the seat tube.


High adjustment seat post standard

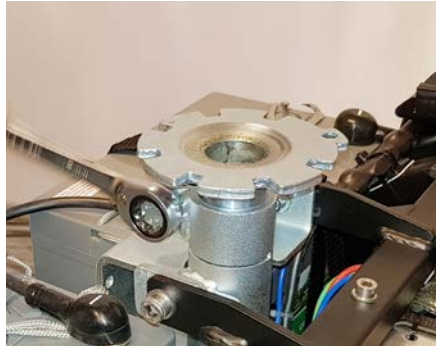

*Loosen the counter nut.
Use spanner, 17 mm.*



Adjust the seat post to the desired position. The seat post is marked with a ring at each centimetre.

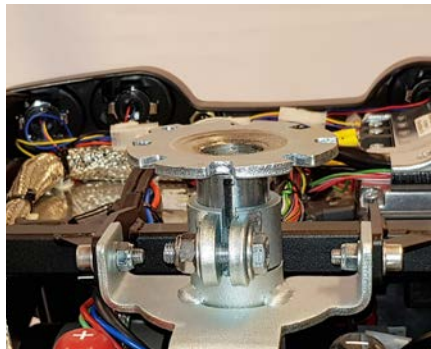


Be aware that the black line is holding its position after movement, so the seat is straight in front of the steering.


*Tighten the screw, here after the counter nut.
Mount the seat. Adjust the lining if necessary.*




High adjustment seat post with position bolt (option)

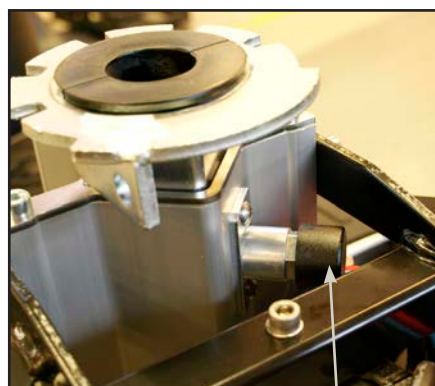

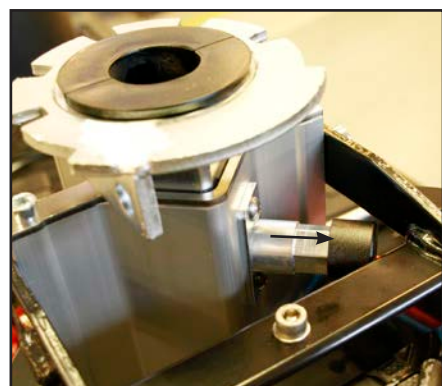

The release button pressed in. Press the button out to release the seat tube.

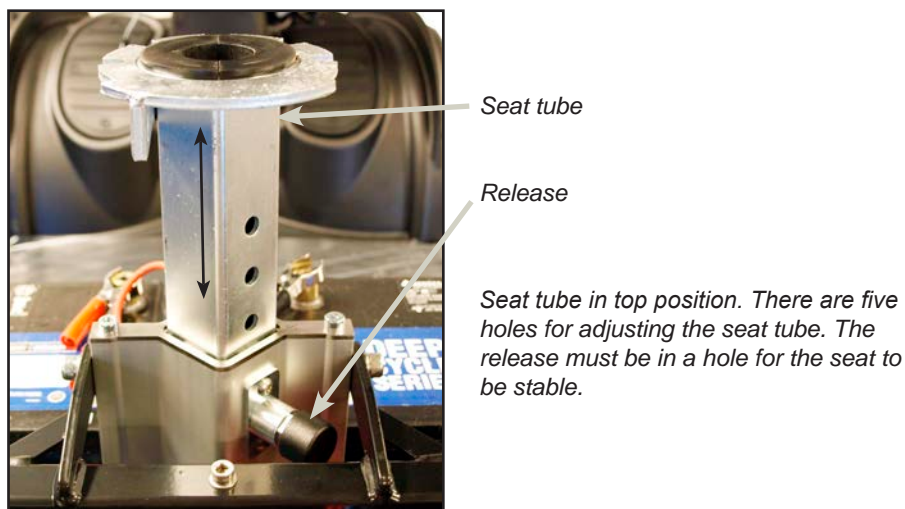


Release button pressed out. Now the seat tube can be moved up/down to the height you wish. Press the release button again and make sure it is fitted in one of the 5 holes in the seat tube.



 **IMPORTANT!** The Mini Crosser is most stable when the seat is in its lowest position. Always drive carefully when the seat is raised. Never use the seat adjustment when driving on an uneven surface or in hilly terrain.

 Take extra care when lowering the seat on a Mini Crosser using electric seat adjustment. Make sure that nothing is trapped in the space between the seat and the chassis.

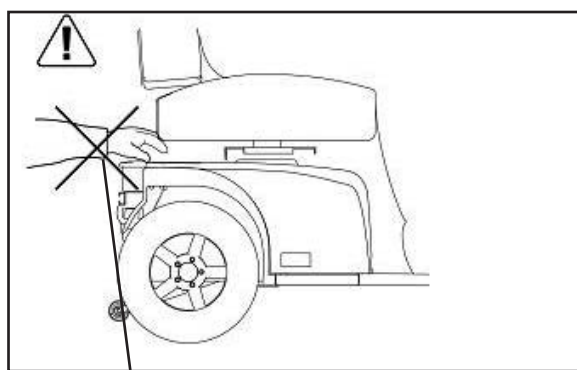

Avoid trapping anything when lowering the seat.

Seat rotation

Pull the release lever back. The seat can be rotated 90° to either side. When the lever is released, it engages with the seat and holds it in place at 45° intervals.

Other seats that can be supplied for the Mini Crosser work on similar principles. The release lever is normally mounted on the right, but can be put on the left if so wished.



Release lever for seat rotation. Release lever for seat forward/back.

Serial number

All vehicles have a serial number plate showing the year of production, and serial number. The same serial number can also be found on page two of the User Manual.

Please quote this number when making inquiries about servicing, spare parts, etc.

Medema A/S Enggaardvej 7, DK-7400 Herring TEL: DK +45 7010 2054 info@minicrosser.com - www.medema.com		CE	M
Varenr. / 570729504	Max. person vægt / vikt - kg 150		
Serialnr. (12) 34503	Type: X-Joy		
Produktion: 2020	Egen vægt: 152	Vehicle's unladen weight inc. batteries and seat	
	Max. km/t: 13	Max. speed	



Position of serial number plate on vehicle.

Driving the Mini Crosser X-Joy

Getting on and off

It is important to learn a safe technique for getting on and off the Mini Crosser.

In general the following method should be followed:

- Make sure that the Mini Crosser X-Joy is turned off.
- Make sure that the brake is on. (Lever for disengaging motor in top position.)
- If necessary, turn the seat through 45° or 90° and make sure that it is locked in position (clicked into place).
- If necessary, raise the armrest.

For some users the assistance of an attendant can be recommended. The attendant should:

- Take care not to injure him/herself when lifting/lowering/supporting the user.
- Make sure that the Mini Crosser is stable and unable to move. Turn off the Mini Crosser and check that the brake is on and the seat has been rotated until it clicks into place at either 45° or 90°.
- Make sure that the seat the user is being moved to is stable.



Turn the Mini Crosser off, rotate the seat and raise the armrest.

General safety advice

Make sure that the backrest is upright and the seat is as low as possible.

Positioning belts are recommended if the user is unable to maintain a good driving posture independently.

Adjust your driving to road conditions. Take light, traffic and weather into account. Be particularly careful when driving in the dark or in bad weather, such as rain or snow. Avoid driving on gradients with poor surfaces, such as: snow, ice, new-mown grass, wet grass and wet leaves.



Never drive when under the influence. This applies not only to alcohol, but also to drugs and medicines.

Reduce speed immediately if you feel you are losing control.

Always use the indicators when changing direction.

Check that lights and indicators are working before driving off. Use your lights when driving after lighting-up time.



ALWAYS switch the Mini Crosser off when it is not in use. I/O button.



Warning!

If the vehicle behaves abnormally in any way - makes noises, smells burnt, etc. - stop the vehicle immediately and seek technical assistance. By continuing to drive, there may be danger of fire or that vital parts are destroyed.

Driving

Even though the Mini Crosser is very stable, it can tip over. Avoid sudden changes of speed and direction when travelling at high speed, on poor surfaces and, not least, on slopes. So be extra careful in following the driving tips given below.

Anti-tilt wheels are recommended for driving in very hilly terrain.

New users are urged to practise the following in an area where there is no other traffic:

- Set the Mini Crosser to low speed. Drive forwards and backwards. Gradually turn the speed selector up and feel the change in the speed of the Mini Crosser.
- Practise starting and braking. Get used to the Mini Crosser's response time.
- Practise driving in a narrow space, similar to inside a shop or through a door.
- Practise turning, and get a sense of how much space is required. Always drive slowly when turning. Practise reversing too.
- Practise cornering and driving over obstacles and on slopes. Always drive straight up/down kerbs and ramps. Never at an angle. See the illustrations on the following pages.
- Try braking at different speeds and notice the stopping distances.
- If possible, try driving on different surfaces (road, grass and gravel).
- Practise assessing how far you can drive on a single battery charge. Note how quickly the battery indicator changes from green to amber to red.

Note!



The driving distance of the Mini Crosser will be reduced when driving in hilly areas, into a head wind, in cold weather and with low tyre pressure.



The stopping distance is significantly increased when driving down inclines and hills.

Traffic regulations

The traffic legislation for Mini Crossers varies from country to country. Before starting to use the vehicle outdoors, it is the user's responsibility to familiarise him/herself with the relevant legislation.

Lap belt



Lap belt

If there is a need for it you can, as an accessory, mount a lap belt or harness belt on MC 1124.

The belt is designed to stay safe to use for at least 10 years.

Electromagnetic compatibility



If the Mini Crosser starts making involuntary movements or if the brakes are released, turn the Mini Crosser off as soon as it is safe to do so. In certain circumstances a Mini Crosser can set off shop alarms.

The Mini Crosser satisfies the requirements for the use of Mini Crossers in an environment with electromagnetic noise. There may, however, be rare situations in which electromagnetic noise can affect the Mini Crosser. Sources of such noise include radio and television stations and amateur radio transmitters.

When driving in traffic

Be particularly aware of the following when driving in traffic:

- The Mini Crosser is a low vehicle and not always easy for other road users to see. Make quite sure that other road users have seen you before driving onto the highway.
- Keep an eye on traffic behind you. Keep well over to the side of the road when driving on busy roads.
- Turning right and left at crossroads. Be aware of cyclists and pedestrians. Follow the rules of the road for cyclists.
- How quickly things are happening. How long do the lights stay green? How quickly are cars approaching? etc.

Specific driving situations

Up kerbs

- Stop at right angles to the kerbstone about 5-10 cm away from it. Keep an eye on other road users.
- Lean forwards.
- Accelerate moderately so that your vehicle can overcome the obstacle. Do not stop halfway, but reduce speed once the vehicle is up.
- If the kerb is too high, do not try again, but find an alternative route.



Down kerbs

- Lean back.
- If you are driving onto a road with traffic, keep an eye on other road users.
- Drive forwards and down the kerb at low speed. Make sure that your anti-tilt wheels (if fitted) do not catch on the edge.



Up a ramp/hill

- There is a risk of tipping over backwards if the seat is pushed back when you start driving up a slope, e.g. a ramp.
- Pull the seat forward! Check that any ramp is stable.
- Lean forwards.
- Accelerate moderately so that your vehicle can overcome the obstacle. Do not stop halfway. Reduce speed once the vehicle is up. If you need to start on a hill, accelerate slowly so as not to tip over backwards.
- Avoid many starts / stops when driving on steep hills. It can over-heat the Mini Crosser.



Down a ramp/hill

- Check that any ramp is stable.
- Lean back.
- Drive slowly down. Avoid stopping midway on short, steep slopes. On long hills, it is advisable to stop every now and again if you feel your speed is getting too high.



Across a slope

- Lean into the slope.
- Avoid sudden and sharp movements. This is particularly relevant when reversing.
- Always drive at low speed.

Long hills/difficult ground

The Mini Crosser is at risk of overheating on very long and steep hills or on very soft ground, possibly also combined with high user weight.

To protect the Mini Crosser motor from overheating, there is a built-in thermo sensor, which initially sets the Mini Crosser to half speed.

However, if you carry on moving over difficult ground, the Mini Crosser will at some stage stop completely. The Mini Crosser must be left to cool down for 3-5 minutes before it can start again.



Important!

Avoid many starts / stops when driving on steep hills. It can overheat the Mini Crosser.

To reset the fault, switch off the Mini Crosser then turn it on again.

If the Mini Crosser has not had long enough to cool down when it is restarted, it will initially only run at half speed.

Note:

The situation described above will never happen in normal use. It only happens if the conditions are extremely challenging.

Anti-tilt wheels / stabilisers

The Mini Crosser is a very stable vehicle. HOWEVER, in the case of incorrect weight distribution or careless driving there is a risk of tipping over.

We therefore recommend fitting anti-tilt wheels in such circumstances. (See picture below). Contact Medema for more info. Find contact information on page two in this manual.



Anti-tilt wheels

Batteries

The Mini Crosser uses sealed, maintenance-free GEL or AGM batteries.


They do not generate gas and do not have to be topped up with water.

Battery weight

56 Ah = 21 kg

85 Ah = 27 kg

It is important to fit the batteries correctly. The battery terminals are marked +/- . They must be fitted as shown in the sketch below. Make sure that the terminals are properly tightened. For the same reason there must not be any burrs on the cable terminals.

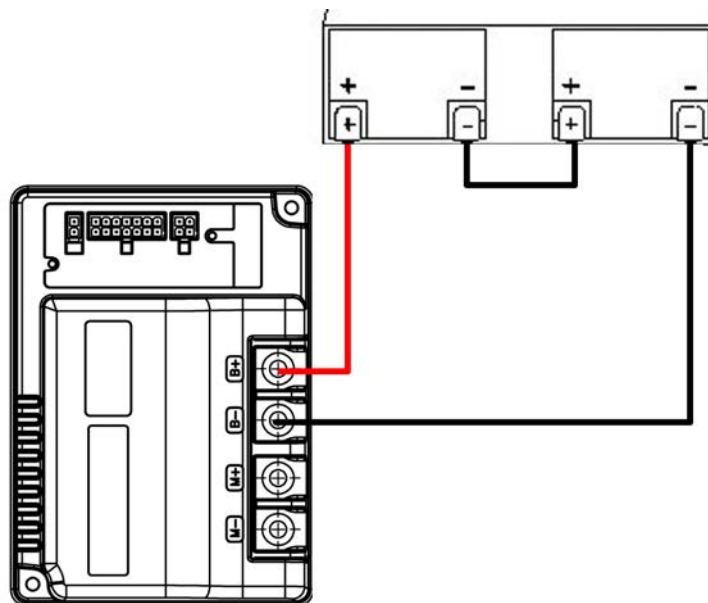

Be aware that the Mini Crosser can vary types of chargers. Contact your dealer for more information about the different types.



NEVER use a charger that are not intended for charging dense, maintenance-free batteries.



Do NEVER use other chargers than the one from the factory without contacting your dealer first.

Storage/Charging

The Mini Crosser is designed for use in all types of weather. However, storage and charging should take place under a roof, alternatively under tarpaulin.

The batteries are best charged at +10 to + 30 °. At colder temperatures, capacity decreases, and thus driving distance.

It is recommended that it charge indoors once in a while.

Note!



The charger must be kept dry, but must not be covered directly over during use.

If you do not use the Mini Crosser for a long time, e.g. for winter storage, you can choose to remove one of the pole shoes for the fully charged batteries. Thereby, there will be no consumption of standby power.

The tires are protected by raising the scooter.

It is also recommended to cover the scooter against dust, rain and sunlight.

Charging

Please NOTE that the Mini Crosser can be equipped with several types of charger (ask your dealer for information on the various types).



IMPORTANT! Only ever use a charger designed for charging dry maintenance-free batteries. The max. charging current is 12 A.

If charging is to take place outdoors, an enclosed charger without a fan should be chosen.

The battery indicator shows how much power is available to the Mini Crosser.

- Red, yellow and green indicate that the batteries are fully charged.
 - Red and yellow indicate that the batteries will soon need recharging.
 - Red indicates that the batteries need to be recharged as soon as possible, otherwise the Mini Crosser will cut out.
-

The battery manufacturer recommends that the batteries are charged at a temperature of + 10° to +30° C in order to achieve a charging time as specified in the section Technical data.

The battery capacity is approx. half at -10 ° C compared to the capacity at + 20 ° C. It is recommended that the batteries be charged every night if the Mini Crosser has been used.

Avoid deep discharge. We recommend charging in a heated room. If this is not possible every day, it is a good idea to charge the Mini Crosser in a warm (approx. 20 °) room once a week.


New batteries only reach full capacity after approx. 20 times discharges and charges.



NOTE! that the capacity of the batteries decreases with time and at low temperatures. In practice, this means that a vehicle with old batteries has less mileage than it had when the batteries were new.

When driving in hilly terrain, on slopes and up curbs, the distance that can be driven before recharging the battery is reduced.

The Mini Crosser should charge when the vehicle is not in use. The type of charger supplied by the factory automatically switches to maintenance charging (very low power consumption) when the batteries are fully charged. Therefore, leave the charger connected until the Mini Crosser is to be used again. The charger cannot overcharge the batteries.

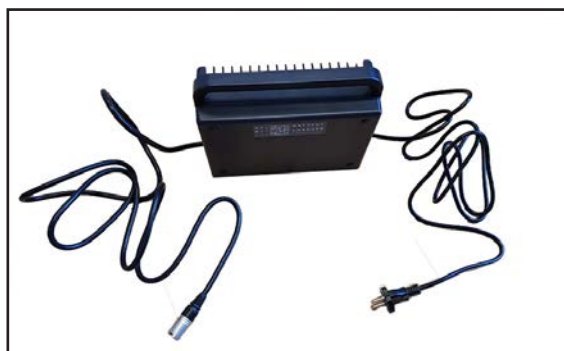

JK Medico charger

Important!

Don't leave the charger on the seat during charging.

The charger will flash until it is finished. Then the indicator on the charger will be constantly lit.

Connecting the charger



Connect the plug to the wall socket



Connect the charging plug to the 3-pin socket on the steering column. The charging socket is located under the protective cover.

Note



If the battery is 100% discharged (deep discharge), it is not possible for the charger to start charging the battery.

There is no warranty on batteries that have been damaged as a result of deep discharging.

If you are not using the Mini Crosser for a longer period of time, for example during winter storage, you can choose to disconnect the one pole to the fully charged batteries. This way there will be no consumption of standby power.

Battery disposal

Used batteries must be disposed of through your supplier or at a recycling centre.

Take care when handling any leaky batteries, as they contain corrosive acid.

INFO! New batteries can be purchased from Medema A/S.

Changing the wheels

If you get a puncture in one of the pneumatic tyres or if a tyre is so badly worn that it needs to be replaced, follow the instructions below.

Tyres and inner tubes can be purchased from the authorised dealer who supplied the Mini Crosser.

The Mini Crosser must be TURNED OFF before you start.



Changing the wheels on the 4W model

Remove the hubcap.

5 mm Allen key

- Undo the five bolts.
- Take the wheel off.
- When the wheel is put back on, the spring washers must be refitted between the wheel rim and bolts.

The bolts must be done up tightly.



Remove the valve cap and use a screwdriver or similar to open the valve so that the air can be released.



Important!

There is a risk of explosion of the wheel, if the two rims are being taken apart with air in the tire.



REMEMBER!

- to let all the air out before taking the wheel apart to repair a puncture
- to secure the bolts with spring washers



Remove the flange with the 5 screws (5 mm Allen key).



Replace or patch the tube. Ensure that there are no foreign objects in the tyre before the tube is replaced. Pump air into the tube so that it is positioned correctly in the tyre, but do not fill it up completely yet.



In this way the tube will not get jammed, when the flange is mounted again.

Put the flange back on.

Pump up the tyre to the correct pressure. (See technical data)



Put the wheel onto the Mini Crosser again.

REMEMBER!
The spring washers between the screws and the wheel rim.


Fuses

The Mini Crosser has the following protection systems:

Thermal, which disconnects the power to the motor when overloaded. This thermal fuse is placed on the back of the Mini Crosser. The fuse protects against overloading of both steering and engine. When overloaded, it will switch off the engine - full speed and traction can be resumed after the motor has cooled down for 2-5 minutes.

The fuse can also be pulled to disconnect the power. Be aware, that you must pull it quite hard.

Mini Crosser X-Joy also features a built-in fuse in the steering box. This will turn off, for example, hard driving in wet grass or very soft ground - wait 5 sec. Before you turn on the Mini Crosser again. This fuse will be activated before the thermal jump.

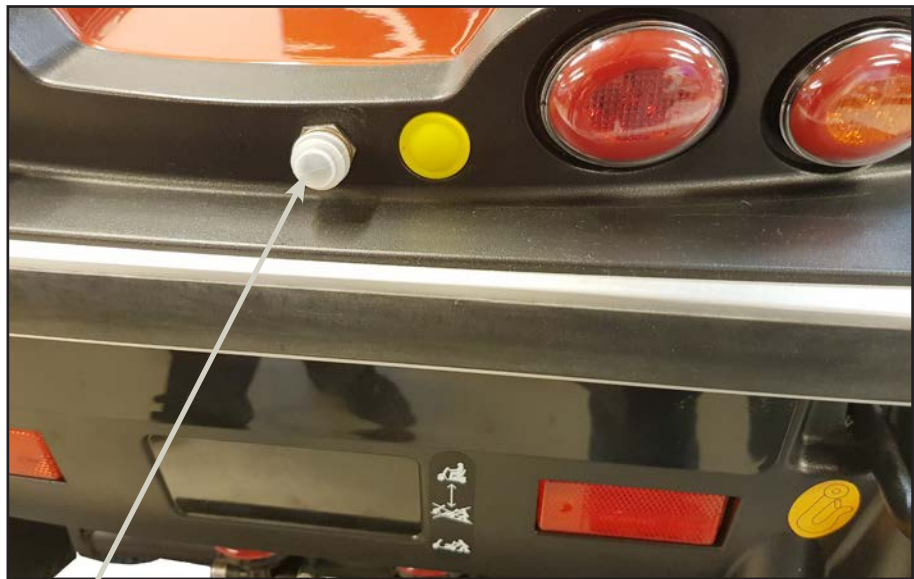

Thermal fuse placement

Brakes

There are three braking systems on the Mini Crosser:

- Motor brake - adjusts vehicle speed also when going downhill.
- Magnetic brake - the magnetic brake is automatic and engages when the Mini Crosser stops. In an emergency, the Mini Crosser can be stopped instantaneously by turning of the joystick. Please note that this will cause very hard braking. The rear wheels will lock.



Must NOT be used in the normal course of driving.

The brake must never be disengaged mechanically using the disengagement lever on a slope. This function is only designed for use when pushing the Mini Crosser on a flat road.

- Hand brake - intended as an emergency brake and parking brake. It must be operated with caution when driving in slippery conditions and downhill.



*When using the hand brake as a parking brake, lock it in braking position by pressing the button in while applying the brake.
To release the brake, press the button again.*

Hand brake lock

Disengagement

Manual

The manual disengagement lever is placed underneath the battery cover. Before disengagement - do the following:

- Turn off the vehicle.
- Push the disengagement lever at the back down.
The motor brake is now disengaged and the vehicle can be pushed or towed, but not driven.

Electronic disengagement

The yellow disengagement button is placed on the back of the vehicle. It works only when the vehicle is turned on.



NOTE!

The motor brake must never be disengaged on sloping terrain.

If the brake is somehow disengaged on a slope/hill, the Mini Crosser will brake automatically when it reaches a certain speed. There is an electric safety feature in the control system, which works even if the battery is disconnected. This is also the reason why the Mini Crosser cannot be towed at more than 5 km/h. See the section about towing.

Once the motor brake has been disengaged, the Mini Crosser can only be stopped with the hand brake.



Push the disengagement lever down to disengage (only hand brake works) and push up to reactivate the motor (normal driving now possible).



Disengagement lever



Electronic disengagement. Works only when the vehicle is turned on.

Disengagement button.

Transporting by motor vehicle

The Mini Crosser must always be restrained and the hand brake locked during transport in a motor vehicle or trailer.

Avoid lifting by the seat, covers, handlebars and armrests

If you just need to lift the Mini Crosser slightly, take hold of it between the rear lights and by the front bumper.

During transport, it may be preferable to remove the seat, for the sake of space.

Important!



If the Mini Crosser is dropped from a height of 0.5 m or higher, it may cause the gears in the gearbox to break.

Secure it in the vehicle with belts attached to the two "eyes" at the front and two at the back. All the "eyes" are marked in yellow. See the section entitled "Securing to vehicle floor with belts".

Important



The vehicle is approved for use as a seat during transport, with a user weight of up to 136 kg.


Securing to vehicle floor with belts


Dahl Engineering belt set for securing in motor vehicles.

ALWAYS use four belts at the back and two at the front.

The belts must always be attached to approved fittings in the vehicle and the four eyes welded to the Mini Crosser.

The belts MUST be attached within the angles shown in the picture for optimum security.

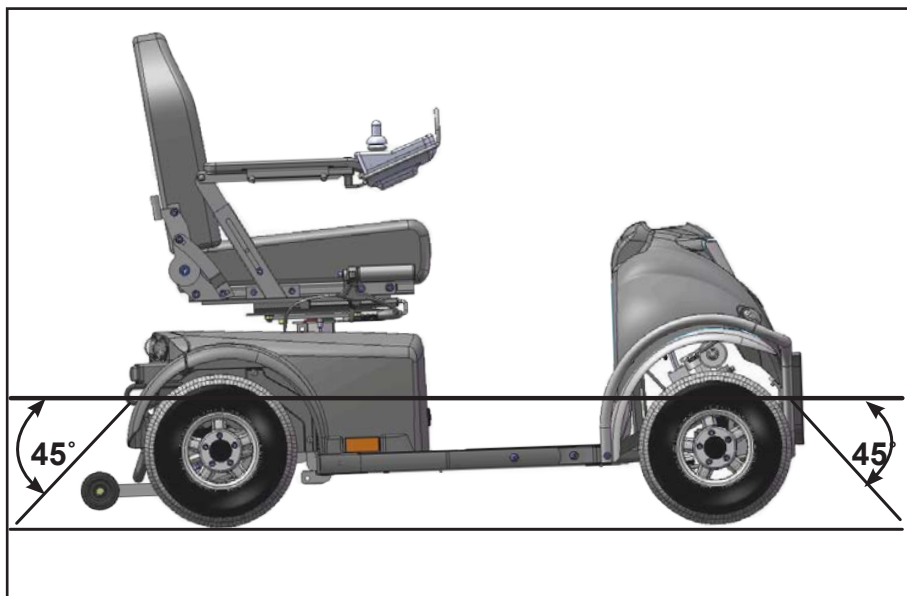

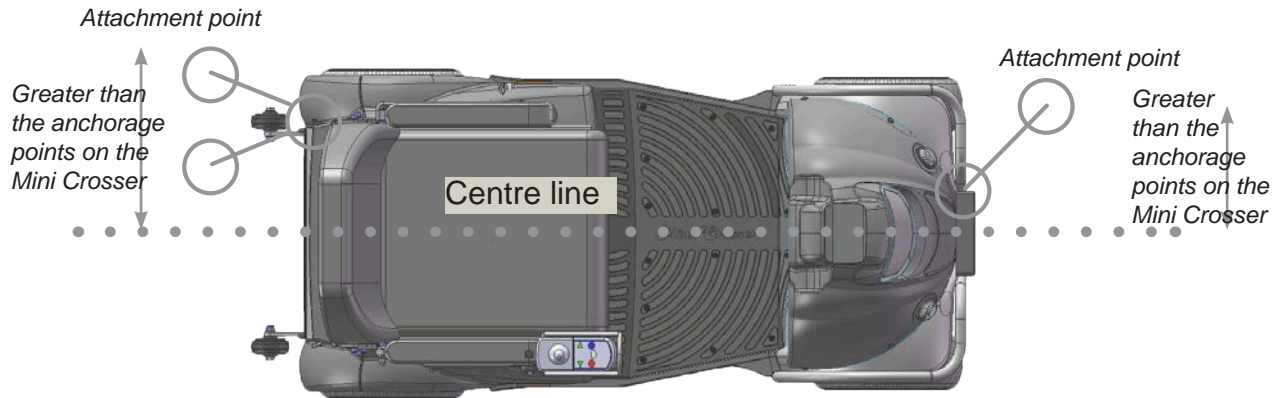




For transport in an estate car, the Mini Crosser must be secured with belts to the floor of the car
Eye for restraints

The Mini Crosser can be used as a seat during transport in a van or bus, provided it is securely anchored to the vehicle with approved four-point belts attached to the restraint points provided on the Mini Crosser.
 The Mini Crosser's restraint points have been tested and approved in accordance with ISO 7176-19 for a user weight up to 136 kg.

The user must also always be independently restrained in the actual motor vehicle in accordance with traffic legislation rules.

Example

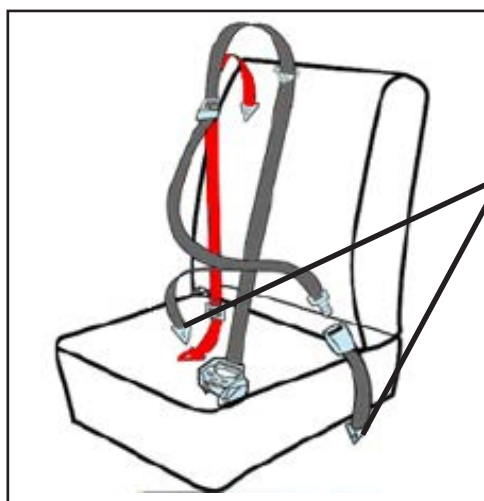

Restraining the passenger with a static 3-point seat belt:

Secure to the rearmost retractors.

The shoulder belt must rest against the collar bone and fall diagonally to the hip, where it is secured.

Tighten the belt by pulling on the loose strap. Undo it again by lifting the buckle. This is the same as on an aircraft.



Retractor with belt



Male and female parts of belt done up



Remember to turn the Mini Crosser off during transport. Turn the vehicle off (I/O button).


However, if at all possible, we recommend that the user occupies one of the seats in the motor vehicle. After all, this is safer.

Transporting by plane

If the Mini Crosser is to be transported by plane, the airlines require:

- the batteries to be flight-approved
- the air to be let out of the tyres
- the battery leads to be disconnected (not always, but frequently)


The seat and cover have to be removed to disconnect the battery leads.

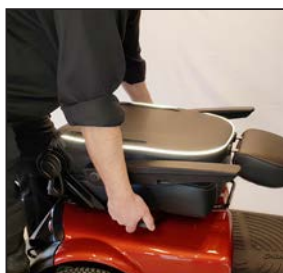

Lift the armrests up, and fold the seat completely. Release the seat turn - turn the seat a little and lift it of.



Remove the thumbscrew and remove the battery cover.

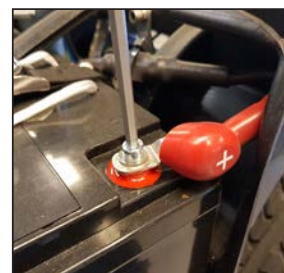

Disconnect the (+) pole.

A battery declaration for air travel can be requisitioned from Medema A/S.home page.

<https://www.medema.dk/tjenester/service-reparation/flycertifikat/>

Towing



If you should be unfortunate enough to break down, the Mini Crosser can be towed or pushed. The Mini Crosser must always be turned off and the motor brake disengaged during towing. See the section on Brakes.



If the Mini Crosser is to be towed, secure a rope to the tow fitting on the front - marked with a yellow "hook mark". Do not tow faster than 5 km/h. The Mini Crosser will generate electricity when it is towed, with the motor acting as a dynamo. If it is towed at more than 5 km/h, there is a risk of the motor generating enough electricity to damage the Mini Crosser and, in the worst case, cause a fire.


The Mini Crosser will try to brake if it is towed at more than 5 km/h.

Dimensioned drawing, Mini Crosser X-Joy

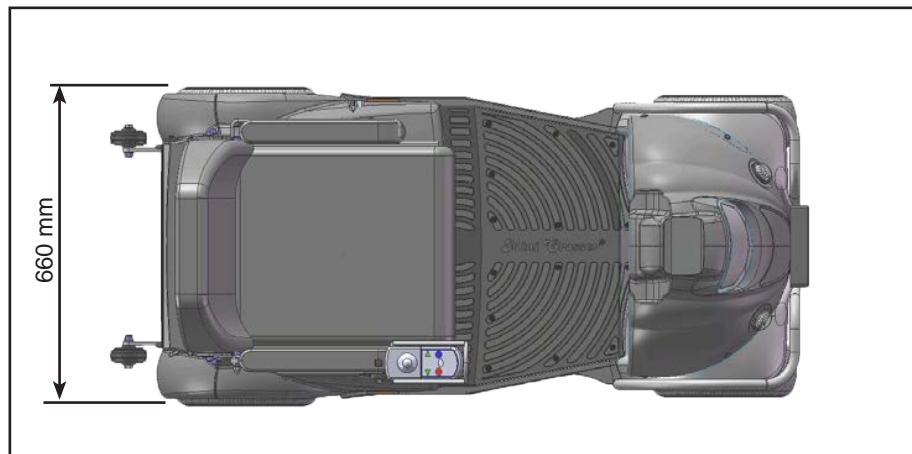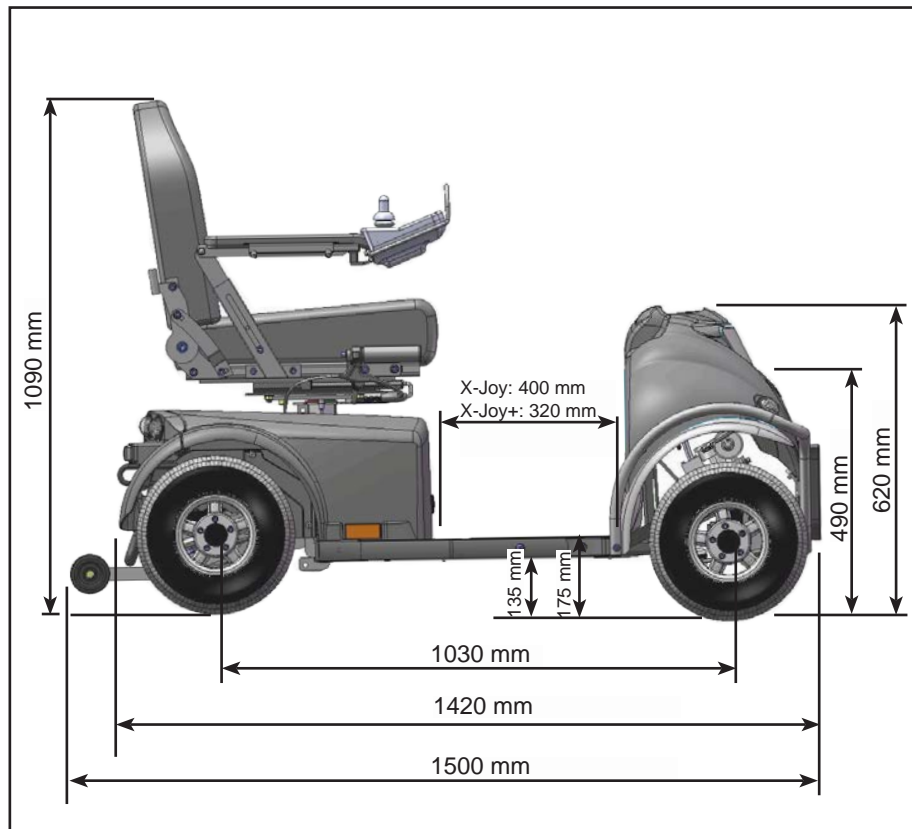

Introduction to the Ergo2 seat

The Ergo2 seat is designed to stay safe to use for at least 10 years.

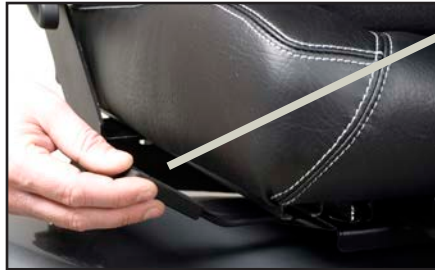

Lever for rotating the seat

The lever must be pulled back to rotate the seat. The seat can then be rotated to each side, locking at each 45°.


The lever is spring-loaded, and the seat is locked automatically when the lever is released. This lever is located on the right side as standard, but can also be positioned on the left side. When the lever is located on the left-hand side, it must be pushed forward in order to rotate the seat instead of pulling back.



Out / in adjustment of the lever for rotating the seat

Lift the seat off the vehicle.

Loosen the two Allen screws and the lever can now be adjusted out and in to the desired position.

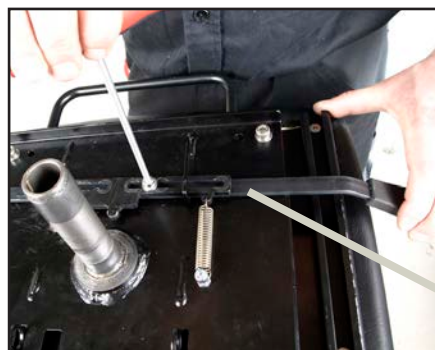

Placement of lever for rotating the seat on the left-hand side

Remove the two Allen keys and pull the lever out. Insert the lever from the left-hand side and tighten the Allen screws.

When installing the lever on the left-hand side, the lever must be pushed forward to rotate the seat..



Mount the seat again

In order to ensure that the seat returns to the correct position, the lever for rotating the seat must be released in order to place the seat.



Lever for fwd/bw adjustment of the seat.

Pull the lever up to release the seat on the slide rail.

Then the seat can be moved forward or backward as desired with 200 mm of travel.

When the lever is released, the seat will automatically lock into place in the closest position.



Height adjustment of armrest

Unzip the zipper on the side of the backrest and the backrest itself.



Unscrew the Allen screw and the armrest can be pushed up or down as needed. It can be adjusted 140 mm.



Width adjustment of armrest

Each armrest can be adjusted 25 mm on each side.

Loosen the Allen screw and the armrest can be adjusted longitudinally.



Adjusting the angle of the armrests

The adjustment screw makes it possible for the armrest to be adjusted 60°.

The armrest can be tilted up to facilitate entry and exit.



Adjusting the angle of the backrest.

The angle of the backrest can be adjusted 45° backward and 90° forward. This is done by pulling the lever on the right-hand side of the seat.



Backrest tilted 45° backward.



Backrest tilted 90° forward.

This is why the seat does not necessarily need to be removed during transport, e.g. in a car.



Backrest forward / back.

Loosen the specified screws on both sides.



The depth of the seat can now be adjusted by sliding the seatback forward and back.

Shown here with 320 mm seat depth.

The seatback can then be moved backward to the edge of the rail and forward to the desired position. Tighten the screws after adjusting.



Shown here with 550 mm seat depth



Height adjustment of headrest.

Press the button and the headrest can be raised and lowered as needed.



Adjustment of the headrest forward and backward.

The headrest can be tilted forward and backward as needed.

Flame resistance

The Mini Crosser seat's flame resistance has been tested in accordance with DS/EN 1021-2:2014 Furniture - Assessment of the ignitability of upholstered furniture - Part 2: Ignition source match flame equivalent.



Warning!


The seat may become very hot if exposed to direct sunlight. Similarly, the seat will become very cold if it is exposed to cold temperatures, e.g., frost.

Basket on seatback



Mounting of basket on the seat. (Optional accessory)

Complete mounting kit for basket.
Two brackets and four Allen screws.

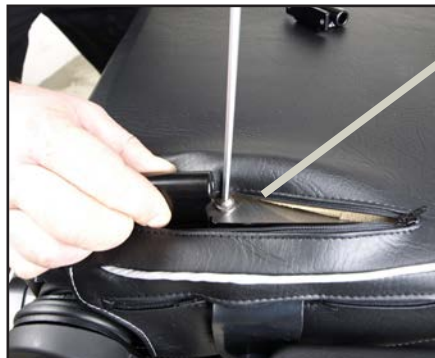

Unzip the zipper and position the brackets in front of the two predrilled holes.



Mount the basket on the brackets and now it is ready for use.
Remember to insert a locking split after mounting.

Baskets are part of a wide range of accessories. Contact your local dealer or Medema A/S. See contact information on page two in this manual.

Electric functions

The Mini Crosser seat can be equipped with up to two electric functions. Options listed below.

- Seat up / down
- Seat turn
- Seat forward / backward
- Tilt
- Backrest angle

The Joystick is able to handle up to two electric functions. If you need more than two electric functions, it is possible to install a small switch box on the armrest (The one without the joystick) and control one or two more functions with contacts.



Press the MODE button, until the part you want to adjust, lights up.

Use the joystick up / down to adjust. Press MODE again to leave the menu.

Contact Medema A/S or ask your dealer for options.



Electric functions by switch box.



Warning!

When using the electrical functions, the cables may become pinched or worn.

The cables are equipped with a protection



Troubleshooting

The following is a list of various problems that, in our experience, may occur. The list gives possible causes and remedies.

Problem	Possible causes	Solution
<p>The Mini Crosser will not go.</p> <p>The battery indicator is not lit.</p>	<p>The joystick has not been turned on (I/O).</p> <p>The batteries are completely flat.</p> <p>The control fuse has blown.</p> <p>The main fuse have blown.</p>	<p>Turn on the joystick (I/O) and wait 5 sec. before activating the accelerator.</p> <p>Charge the batteries.</p> <p>Change the fuse.</p> <p>Contact supplier.</p>
<p>The Mini Crosser will not go, but the battery indicator is lit.</p>	<p>The Mini Crosser has been overloaded.</p> <p>The hand brake is on.</p> <p>There is a fault in the electronics.</p> <p>The batteries are flat.</p> <p>The charging plug has not been removed.</p>	<p>Wait approx. 1 min. before trying again. The vehicle must be turned off (see section on Fuses).</p> <p>Release the hand brake.</p> <p>Contact supplier.</p> <p>Contact supplier.</p> <p>Remove the charging plug.</p>
<p>The driving speed is too low.</p>	<p>The speed selector is on slow.</p> <p>The electronics are overloaded.</p> <p>There is too little air in the tyres.</p>	<p>Change to a faster speed.</p> <p>Stop and wait a few seconds before starting.</p> <p>Pump the tyres up to the right pressure.</p>
<p>The driving distance per charge is too short.</p>	<p>There is a problem with the batteries.</p> <p>Low temperature.</p> <p>There is a problem with the charger.</p> <p>There is too little air in the tyres.</p> <p>The charging method is wrong.</p>	<p>Charge the batteries and check that the green lamp on the charger lights up before driving off.</p> <p>Contact supplier.</p> <p>Pump the tyres up to the right pressure.</p> <p>Read the section on Charging in the User Manual.</p>

Problem	Possible causes	Solution
The charging lamp on the charger does not light up when the charger is connected to the mains and the Mini Crosser.	No power to the switch. Fault in cable. Fault in charger.	Turn the switch on. Contact supplier. Read the operating instructions for the charger. Contact supplier.
The "ready" lamp on the charger does not light up even though the charger has been on for 10-12 hours.	There has been a power cut. The charger is doing a top-up charge. There is a problem with the batteries. There is a fault in the charging plug for the Mini Crosser X-Joy.	Reconnect the charger and repeat the charging process. Check again half an hour later. Contact supplier. Push the charging plug all the way in and repeat the charging process. Read the operating instructions for the charger.
The "ready" lamp on the charger lights up even when partly discharged batteries are connected.	The fuse in the charger has blown. The switch in the charging plug is malfunctioning.	Contact supplier. Contact suppliers - read the operating instructions for the charger.
The charger lamp is showing an error.	The charging plug has not been inserted or there is a mains fault. The battery voltage is too low for charging to start.	Push the charger plug in or contact the supplier. Read the operating instructions for the charger - or contact the supplier.

Troubleshooting

When experiencing an electronic fault a number of LED in the battery indicator will light up. Below you can see the possible cause, and suggested action that you can try before calling the authorised service agent.

LED	Possible cause
1 LED	The batteries needs charging. Or there is a bad connection to one of the batteries. Check battery connections. If they are ok, try charging the batteries.
2 LED	Bad connection to the left motor. Check the connection. If it seems to be ok, contact authorised service technician.
3 LED	There is short circuit between the left motor and battery. Contact authorised service technician.
4 LED	Bad connection to the right motor. Check the connection. If it seems to be ok, contact authorised service technician.
5 LED	There is short circuit between the right motor and battery. Contact authorised service technician.

LED	Possible cause
6 LED	The vehicle is inhibited from driving by an external signal. The cause is depending on the type of the vehicle. Contact authorised service technician.
7 LED	Joystick fault. Check that the joystick is centred and not moved during start up. Turn of the vehicle and then turn it on again.
8 LED	A possible system error is indicated. Check connections. Contact authorised service technician.
9 LED	There is a bad connection to the parking brake. Check the connection between motor and parking brake.
10 LED	Excessive voltage has been sent to the system. This is often due to a poor connection to the batteries. Check battery connections.
7 LED+ S	A communication error is indicated. Make sure that the joystick cable is properly connected and in no way damaged.

Programming






The electronic system is programmable so that the driving characteristics can be optimised for individual users. Programming must only be carried out by people trained in the control systems. Changing parameters incorrectly can produce driving characteristics that are dangerous for the user.



NOTE! For safety reasons, modifications may only be made by trained personnel, such as Mini Crosser service engineers and consultants or authorised service personnel at mobility centres, etc.

The control systems have been tested and meet the requirements of ISO 7176/14 and EN 12184

Technical data

	X-Joy
General information	
Height Mini Crosser, w/seat. Transport height without seat	109 cm 61 cm
Total length: Total length incl. anti-tilt wheel: Total width:	140 cm 150 cm 66 cm
Total weight incl. batteries and Ergo2 Std seat. (45 cm)	158 kg
Weight without seat (Ergo Standard 45 cm).	131 kg
Heaviest part - Ergo2 seat 45 cm	27 kg
Static stability in all directions. Dynamic stability in all directions.	15° 12°
Kerb climbing	11 cm
Max. speed.	13 km/h
Braking distance 13 km/h	2,8 meters
Controller	P&G
KW transaxle	0,7 kW
Turning Circle / radius	330 cm / 165 cm
3-point Turning Circle / radius	190 cm / 95 m
Max user weight - standard	150 kg
Classification, IP Mini Crosser Controller JK Medico charger	IPx4 IPx5 IP54
Wheels	
1503-1003 Wheel, model-X, 2,50-3,30-8".complete with rim and tyre.	2,8 bar 
1503-1008 Wheel model-X 2,50-3,70-8" Outw. Ø326 mm w/ spikes	2,8 bar 
1503-1012 3,50-8" ext. Ø370 mm Wheel, model X Used only as rear wheels and never with 15 km transaxle	2,5 bar 
Classification, ISO	Class C

	X-Joy
Seats:	
Effective seat width Ergo2 child Ergo2 standard Ergo2 HD	35 cm 40, 45, 50 cm 60, 70 cm
Effective seat depth Ergo2 child Ergo2 standard + HD	20-43 cm 32-55 cm
Seat plane angle	3°
Backrest height Ergo2 child Ergo2 standard + HD	44 cm 54 cm
Seat surface height from ground to front edge Ergo2 (child, standard + HD)	59 - 69 cm
Seat surface height from footrest to front edge Ergo2 (child, standard + HD)	42 - 52 cm
Backrest angle Ergo2 (child, standard + HD)	-90° til +48°
Batteries:	
56 Ah Batteries.	35 km (*)
85 Ah Batteries.	60 km (*)
Battery type: Standard: Option:	2 x 12V / 56 Ah 2 x 12V / 85 Ah
Max battery measure i cm. 56 Ah 85 Ah	26,5 x 17 x 23 26 x 17,1 x 21,5
Battery weight pr. stk. 56 Ah 85 Ah	42 kg 54 kg
Energy consumption in kWh, when charging from "empty". 56 Ah 85 Ah	Ca. 1,5 Ca. 1,5
Charger, 24 V DC 56 Ah 85 Ah	6 - 10 A 6 - 10 A
Approx charging time at 20 ° C	8 hours
Lighting:	
Headlight	LED
Rear light	LED
Blinkers	LED
Standard colours Option 1 Option 2	Orange - metallic Black - metallic
Noise:	
Noice level	60db

	X-Joy
The Mini Crosseren X-Joy complies with the following standards:	EN 12184
The Mini Crosser has been tested for the requirements described in:	EN 12184:2014
Various information	
Front basket - maximum load capacity	8 kg
Rear basket - maximum load capacity	15 kg
Wheel bolt must be tighten with max. Dry: Greased	12 Nm 6 Nm

() Driving distance is depending on: temperature, wind, terrain, tyre pressure and user weight.*

Maximum driving distance with new batteries at +20° on flat, firm surface

Optimum battery capacity is reached after approx. 20 charges / discharges.

Cassation



The Mini Crosser or parts (fx. batteries) of the Mini Crosser can, for a fee, be taken to the nearest dealer for disposal in accordance with current environmental regulations.

Weight of the seats



This is our standard Ergo 45 cm seat, the heaviest part of the chair to remove. The label showing the seat's weight is located as shown above.

Seat model	Weight
Ergo2 seat 35 cm	20 kg
Ergo2 seat 40 cm	26 kg
Ergo2 seat 45 cm	27 kg
Ergo2 seat 50 cm	29 kg
Ergo2 seat 60 cm.	36 kg
Ergo2 seat 70 cm.	37 kg

Own notes



medemagroup